


REV.	DESCRIPTION	DATE	THESE DRAWINGS ARE THE PROPERTY OF <i>Tt CO.,LTD.</i> AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION.AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTER CONSENT OF <i>Tt CO.,LTD.</i>
		YYYY/MM/DD	

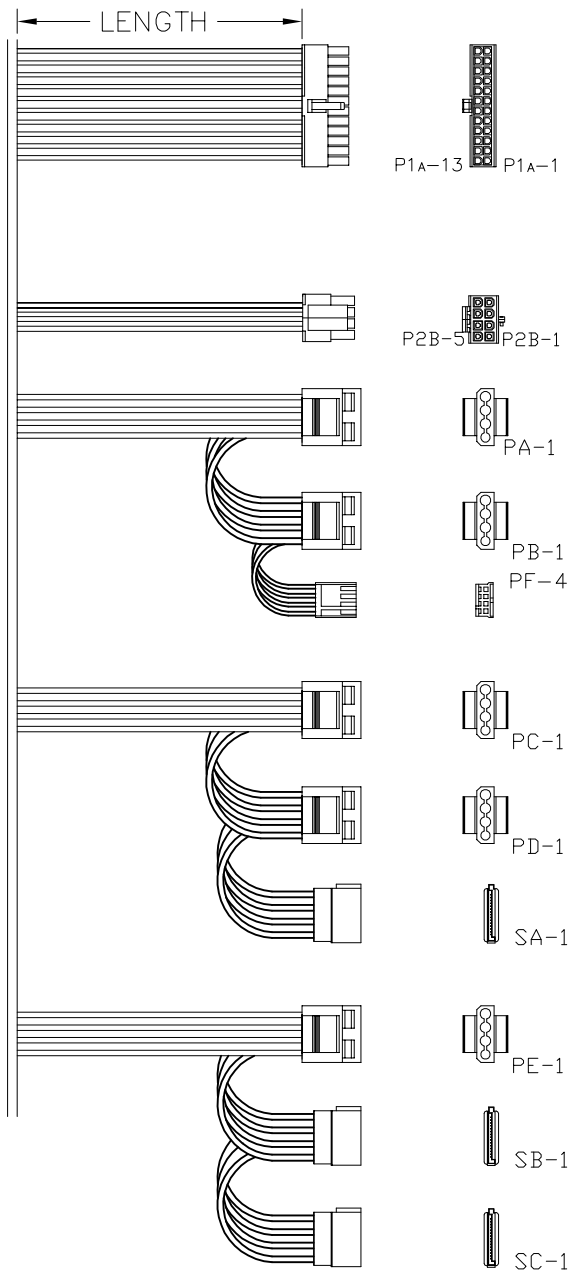

CONN	PIN	WIRE COLOR	OUTPUT	WIRE AWG	LENGTH
P1A	1	ORANGE	+3.3V	18	450mm±25
	2	ORANGE	+3.3V	18	
	3	BLACK	GND	18	
	4	RED	+5V	18	
	5	BLACK	GND	18	
	6	RED	+5V	18	
	7	BLACK	GND	18	
	8	GRAY	PG	20	
	9	PURPLE	+5VSB	18	
	10	YELLOW	+12V	18	
	10	YELLOW	+12Vs	20	
	11	YELLOW	+12V	18	
	12	ORANGE	+3.3V	18	
	13	ORANGE	+3.3Vs	20	
	13	ORANGE	+3.3V	18	
	14	BLUE	-12V	18	
	15	BLACK	GND	18	
	16	GREEN	PS-ON	20	
	17	BLACK	GND	18	
	18	BLACK	GND	18	
	19	BLACK	GND	18	
	20	NC	NC	18	
	21	RED	+5V	18	
	21	RED	+5VS	20	
	22	RED	+5V	18	
	23	RED	+5V	18	
	24	BLACK	GND	18	
P2B	1	BLACK	GND	18	
	2	BLACK	GND	18	
	3	BLACK	GND	18	
	4	BLACK	GND	18	
	5	YELLOW/BLUE	+12V2	18	
	6	YELLOW/BLUE	+12V2	18	
	7	YELLOW/BLUE	+12V2	18	
	8	YELLOW/BLUE	+12V2	18	
PA,PC PE	1	YELLOW	+12V	18	120mm±10
	2	BLACK	GND	18	
	3	BLACK	GND	18	
	4	RED	+5V	18	
PB,PD,PF	1	YELLOW	+12V	18	
	2	BLACK	GND	18	
	3	BLACK	GND	18	
	4	RED	+5V	18	
SA,SB SC	1	BLACK	GND	18	
	2	RED	+5V	18	
	3	BLACK	GND	18	
	4	YELLOW	+12V	18	

REV.	④	SCALE	1 : 1	UNIT	mm	Tt® Thermaltake Technology Co., Ltd			
GENERAL TOLERANCE						DRAWING NAME	Litepower 390W		
0.0 ~ 5			± 0.2	± 0.1		PART NO.	LT-390		
5.0 ~ 20			± 0.3	± 0.2					
20.0 ~ 50			± 0.5	± 0.3		DATE	APP.	CHK.	DRAW
50.0 ~ 200			± 0.9	± 0.4					
200.0 ~			± 1.3	± 0.5		2010/06/29			
ANGLE			± 3°	± 1°					